


Pump-up Foamer

Model: FI-2



OWNER'S MANUAL

Pump-up Foamer Model: FI-2

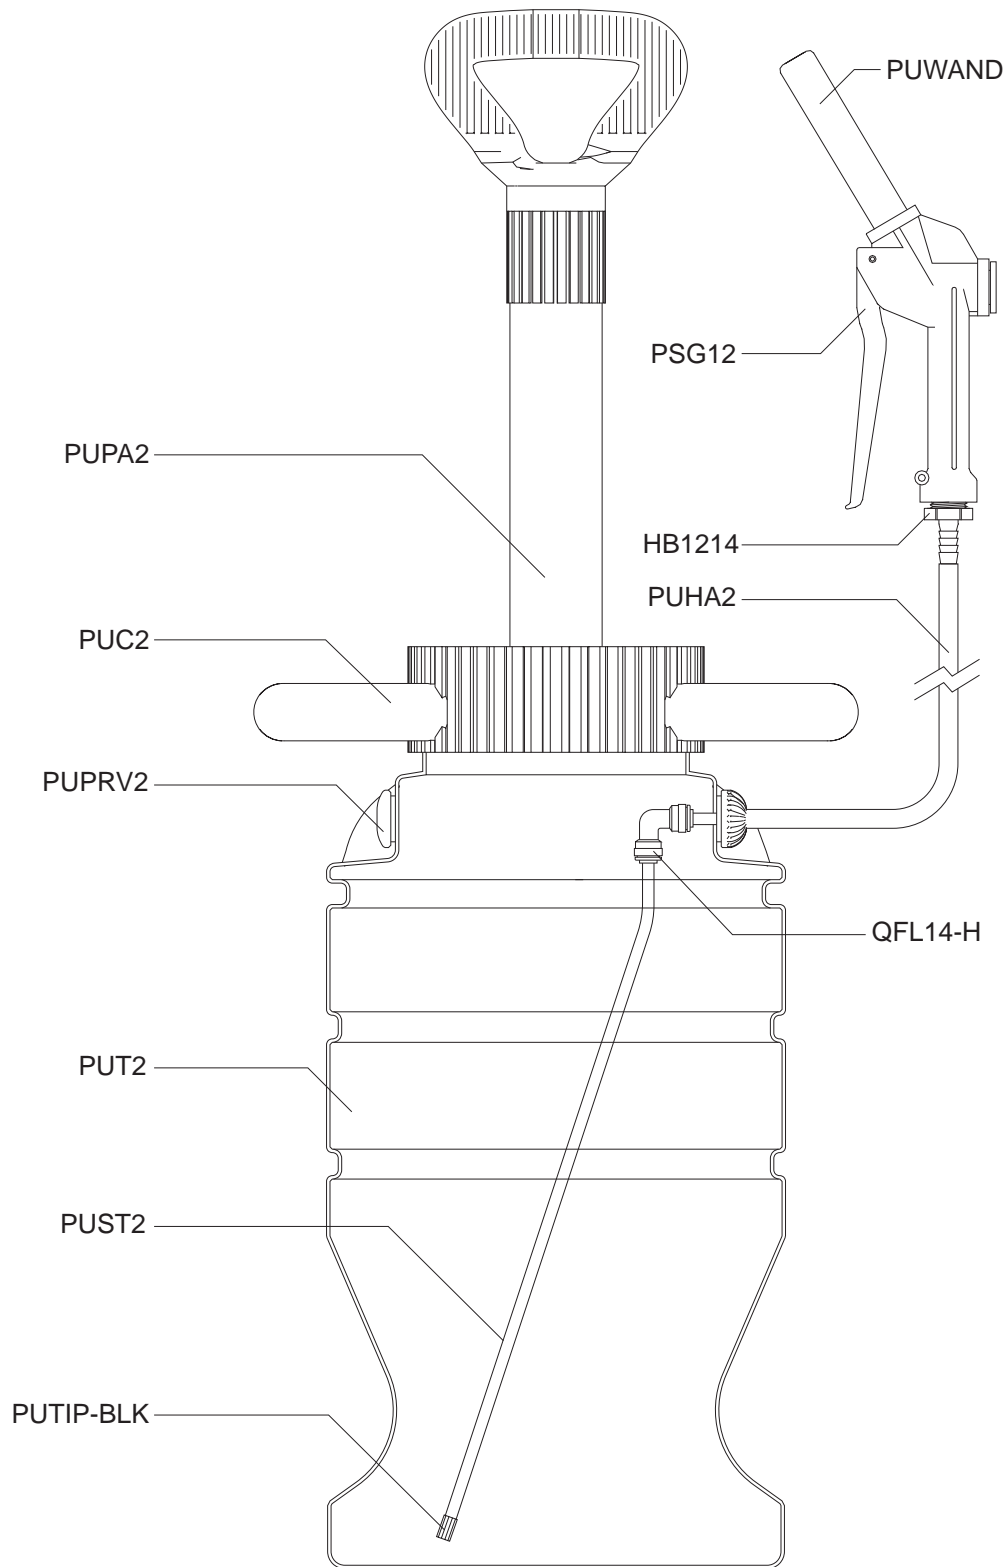

Pump-up Foamer

Model: FI-2

PARTS LIST

PART NO.	DESCRIPTION
HB1214	1/2in MPT X 1/4in HOSE BARB
PSG12	1/2in POLY SPRAY GUN W/ GRAY HNDL. & 316SS
PSGORV	PSG12 VITON O RING
PUC2	PUMP UP CAP
PUHA2	PUMP UP HOSE ASSEMBLY - 40 INCH
PUPA2	PUMP UP PUMP ASSEMBLY
PUT2	PUMP UP TANK - 2 GALLON
PUTIP-BLK	PUMP UP TIP - BLACK
PW124-120	1/2in BLACK POLY PRO X 4in - SCH.120 - 1/2in MPTOE & 1/4in FPTOE
QFL14	UNION ELBOW 1/4in TUBE X 1/4in TUBE
ST6515SS	ST6515 STAINLESS STEEL SPRAY TIP
WAAD-.75	WAADING FOR PUMP-UP FOAMER - 3/4in DIA.
Created: 08/06/2009 Modified: 09/29/2009	

WARNING

1. Always wear proper protective clothing and goggles when dealing with chemicals. Read chemical's MSDS sheet before using this unit.
2. Never point discharge spray wand towards anyone.
3. Depressurize unit after use.
4. DO NOT use solutions above 100°F.
5. Never carry tank by the hose, wand, or unlocked pump handle.

INSTRUCTIONS

1. Release any remaining air pressure by twisting the pressure relief valve to the left ½ turn.
2. Unscrew the cap assembly from the tank.
3. Mix foaming chemical solution following the manufacturer's directions.
4. Fill tank with solution up the first band, or 1 gallon of solution.
5. Replace cap assembly and tighten securely.
6. Turn pressure release valve to the right and tighten to seal.
7. Pressurize tank by pumping approximately 15-20 times depending on amount of solution.
8. Grasp trigger gun, aim in safe direction and squeeze trigger to spray foam.
9. Must remove all pressure from units before emptying or refilling.


NOTE

1. Operator should periodically lubricate the seals of the pump with food safe lubricants such as petroleum jelly, grease, vegetable oil. NEVER USE LUBRICANTS SUCH AS WD40.
2. After each use, run clean water through unit and rinse all parts thoroughly with clean water.

HOW TO CHANGE WAADING IN SPRAY GUN AND WAND

Poly Wand
Item Number: PUWAND

1/2 inch spray gun
Item Number: PSG12

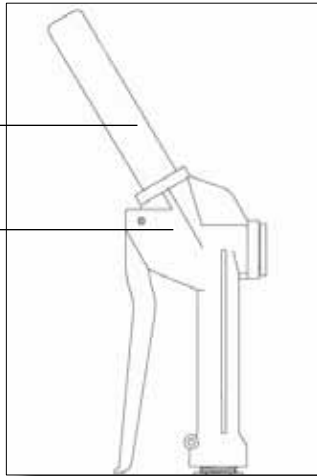

Step 1
Unthread poly wand from spray gun.



Step 2
Remove white waading in poly wand and dispose of waading (Item No.: WAAD-.625).



Step 3
Remove washer (Item No.: PSG75W) in spray gun. Washer may be reused if in good condition.



Step 4
Remove white waading from spray gun and dispose of waading (Item No.: WAAD-.5).



Step 5
Insert new waading (ItemNo.: WAAD-.5) and washer (ItemNo.: PSG75W) in spray gun.



Step 6
Insert new waading in poly wand (ItemNo.: WAAD-.625).



Step 7
Attach poly wand onto spray gun.